



NORTH VILLAGE AVENUE
(NASSAU COUNTY ROADWAY)

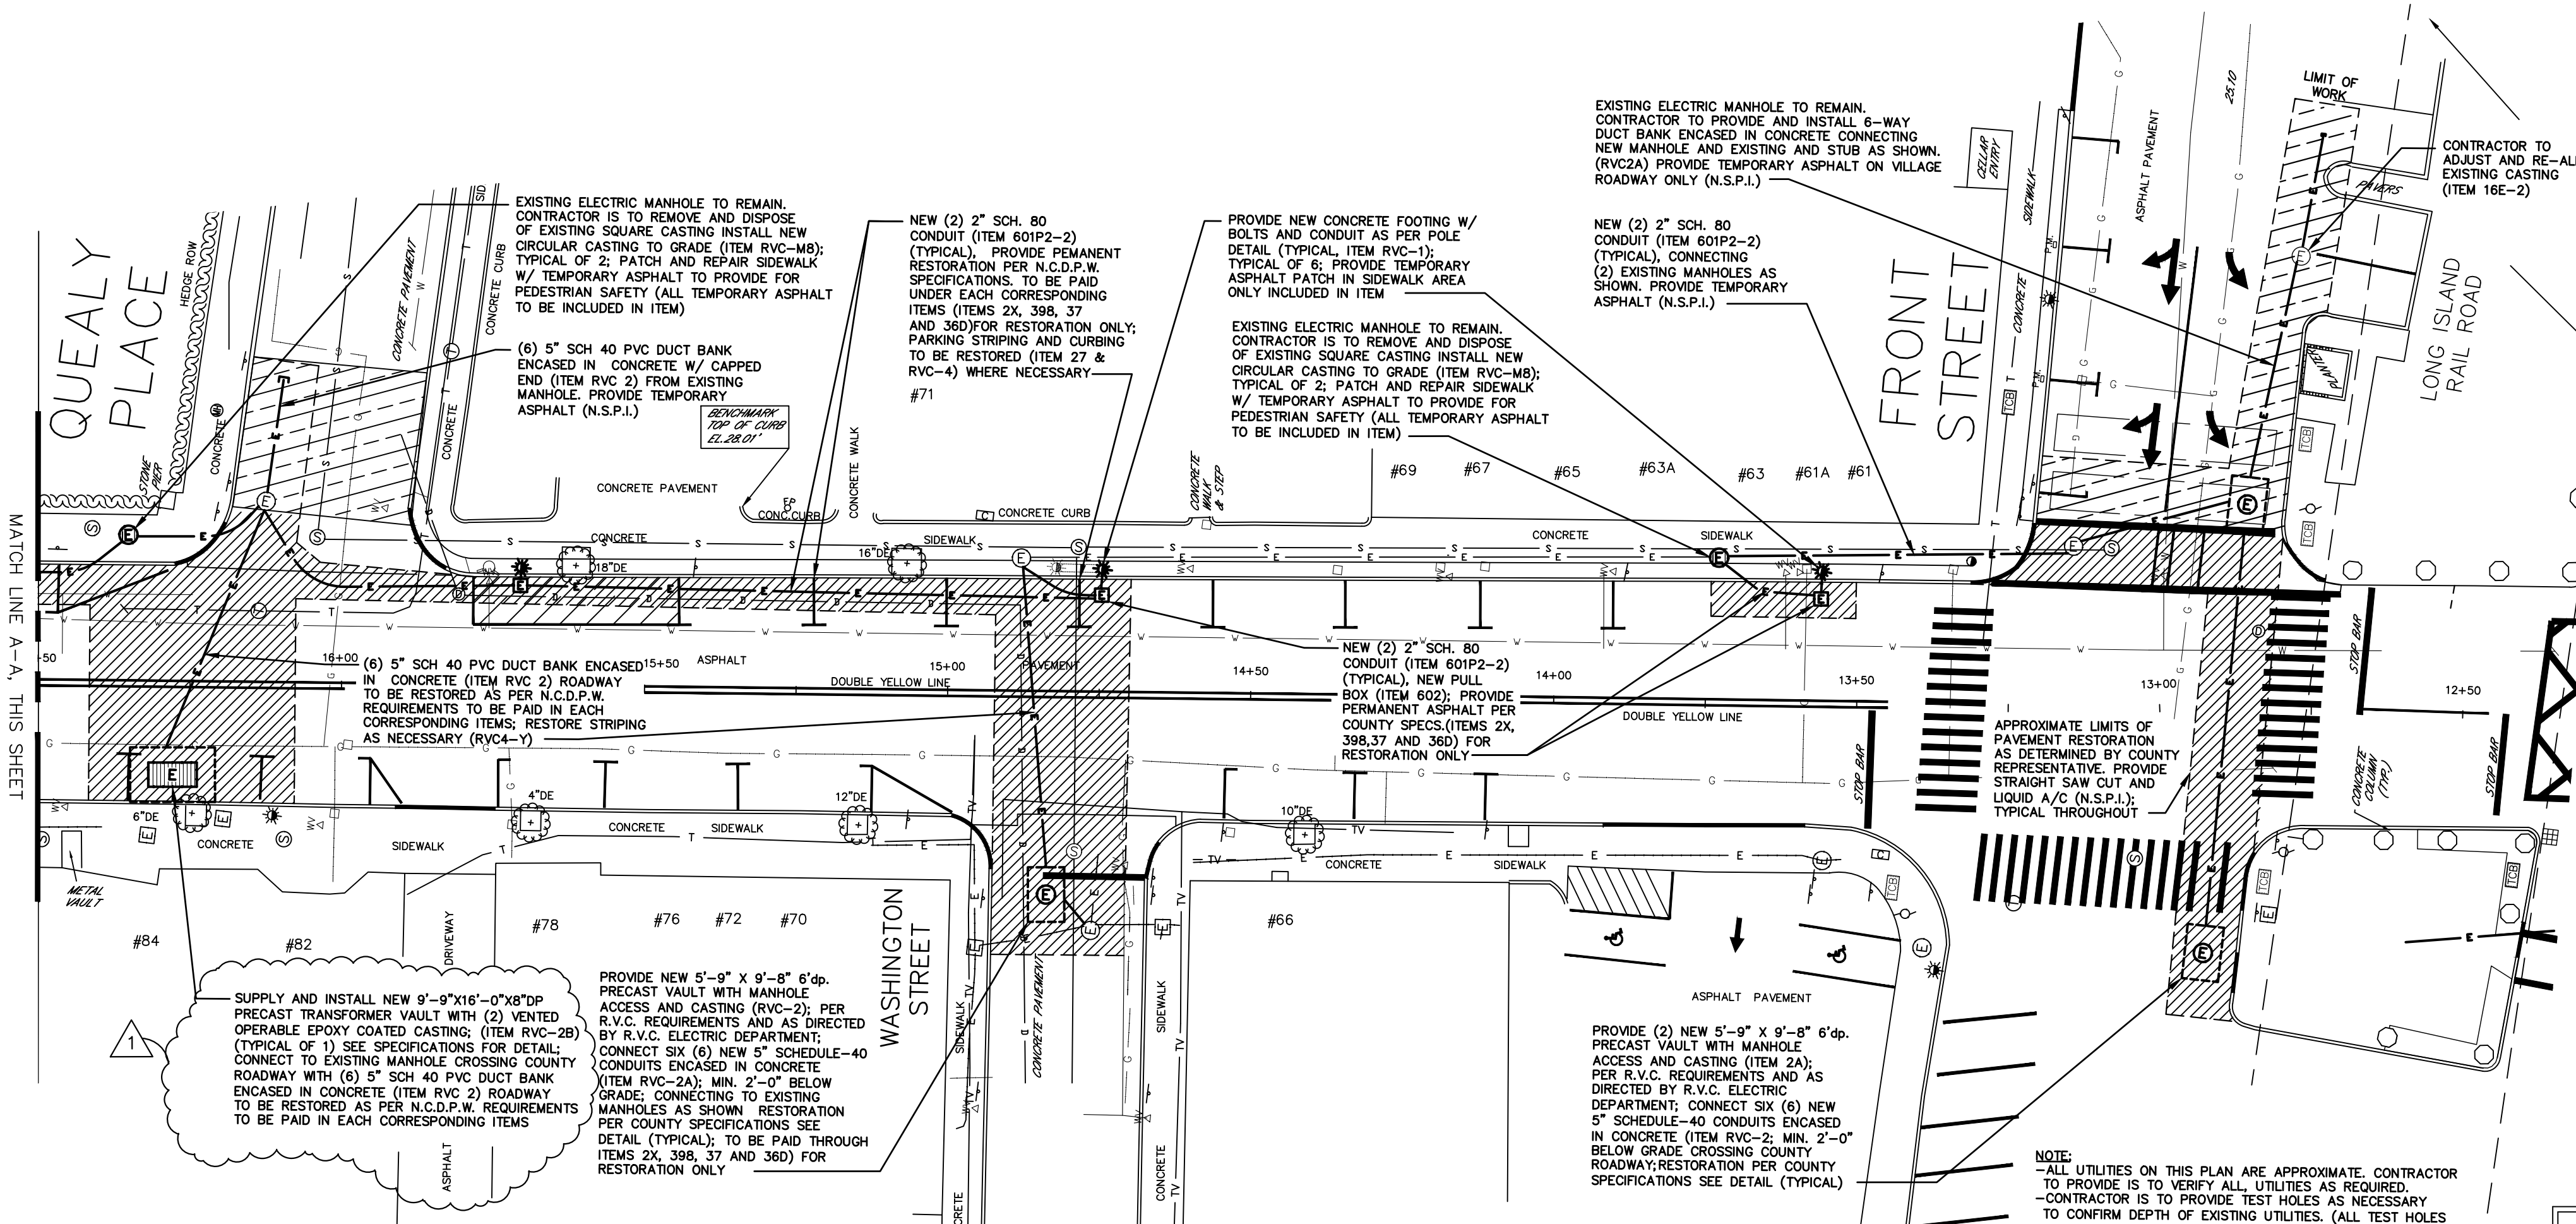

NORTH VILLAGE AVENUE
(NASSAU COUNTY ROADWAY)

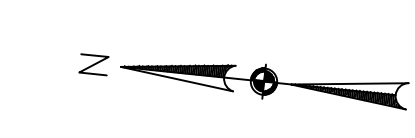

LEGEND	
	UTILITY POLE OVERHEAD WIRES
	SIGN
	GUY WIRE
	SEWER MANHOLE
	DRAIN MANHOLE
	DRAIN INLET
	TRAFFIC SIGNAL BOX
	APPROXIMATE WATER MAIN LOCATION
	WATER VALVE
	APPROXIMATE GAS LINE LOCATION
	APPROXIMATE SEWER MAIN LOCATION
	APPROXIMATE DRAINAGE PIPE LOCATION
	APPROXIMATE ELECTRIC CONDUIT LOCATION
	HYDRANT
	EDGE OF GUTTER
	STONE BLOCK CURB
	EXISTING TOP/BOTTOM CURB ELEVATION
	EXISTING SPOT ELEVATION
	INLET
	DECIDUOUS TREE
	MAPLE
	OAK
	EXISTING ELECTRIC MANHOLE
	EXISTING PULL BOX
	EXISTING LIGHT
	EXISTING CONCRETE CURB
	PROPOSED STANDARD PRECAST CONCRETE TRANSFORMER VAULT (RVCA)
	PROPOSED 9'-9" X 16'-0" X 8' dp. PRECAST CONCRETE TRANSFORMER VAULT W/ (2) EPOXY OPEN GRATE HINGED CASTINGS (RVC2B)
	PROPOSED 2" SCH. 80 PVC LIGHTING CONDUIT (ITEM 601P2-2) OR (6) 5" SCH. 40 PVC ENCASED IN CONCRETE (RVC2)
	PROPOSED ELECTRIC PULL BOX (ITEM 602)
	PROPOSED PRECAST FOOTING W/ ANCHOR BOLTS AND CONDUITS (ITEM RVC-1); LIGHTS INSTALLED BY OTHERS
	EXISTING ELECTRIC MANHOLE TO REMAIN; CONTRACTOR IS TO REMOVE AND DISPOSE OF EXISTING SQUARE CASTING AND TOP SLAB, SUPPLY AND INSTALL NEW 6'x7' CONCRETE TOP SLAB AND CIRCULAR CASTING (ALL TO BE INCLUDED IN ITEM RVC-4S)
	NASSAU COUNTY FULL DEPTH ASPHALT RESTORATION: 1" BASE ASPHALT (ITEM 37) AND 1" TOP ASPHALT (ITEM 36D)
	TEMPORARY ASPHALT RESTORATION: (SEE DETAIL) NO SEPARATE PAY ITEM, N.S.P.I.

Incorporated Village
of
Rockville Centre

DATE	REVISIONS	
6/2/22	#	DATE BY
DRAWN BY MAB	1	3/14/23 MAB
SCALE 1"=20'	2	
SIZE 24X36	3	
	4	
	5	

DISTRIBUTION: ENGINEERING DEPARTMENT

PROJECT: NORTH VILLAGE AVENUE ELECTRIC UPGRADES
ROCKVILLE CENTRE, NEW YORK

TITLE: NORTH VILLAGE AVENUE RENOVATIONS

PROJECT NUMBER: VILLAGE_2022

DRAWING NUMBER: 2_NVILLAGE.DWG

SHEET 2 OF 5

NOTE:
-ALL UTILITIES ON THIS PLAN ARE APPROXIMATE. CONTRACTOR TO PROVIDE IS TO VERIFY ALL UTILITIES AS REQUIRED.
-CONTRACTOR IS TO PROVIDE TEST HOLES AS NECESSARY TO CONFIRM DEPTH OF EXISTING UTILITIES. (ALL TEST HOLES ARE TO BE INCLUDED IN ITEM RVC2A)
-ALL ELECTRIC INFRASTRUCTURE WORK IS TO BE COORDINATED WITH RVC ELECTRIC DEPARTMENT (NO EXCEPTIONS)
-CONTRACTOR TO PROVIDE AND MAINTAIN TEMPORARY ASPHALT RESTORATION FOR ELECTRIC WORK UNTIL ROADWAY/SIDEWALK RESTORATION IS COMPLETE. (NO SEPARATE PAY ITEM, N.S.P.I. FOR THIS WORK)
-ALL NEW CONDUIT IS TO HAVE DRAG LINES INSTALLED AT NO ADDITIONAL COST
-CONTRACTOR TO PROCURE ANY PERMITS FROM COUNTY PRIOR TO START OF CONSTRUCTION. (ALL INCLUDED IN ITEM 10255-C)